

Press tee

Material



- Main body: pressed brass type CW617, nickel-plated from the outside, on surfaces, which do not have contact with water –
- full anti-diffusion barrier
- Clamping ring: stainless steel
- O-ring gasket: EPDM

Area of application

- Installations of hot & cold tap water
- Central heating (radiator connections)
- Surface heating (underfloor and wall heating installations)
- Ice water

Dimensions

Size	L	L1	L2	L3	D	Code
16x16x16	72	26	26	36	11,8	06013003
18x18x18	75	26	26	37,5	13,8	06013005
20x20x20	76	26	26	38	15,8	06013007
25x25x25	92	32,6	32,6	46	19,8	06013009
32x32x32	98,2	32,6	32,6	49,5	25,8	06013011
40x40x40	136	45	45	68	31,8	06013013
50x50x50	147	45	45	73,5	40,8	06013015
63x63x63	206	68	68	103	50,7	06013017
75x75x75	217	68	68	110,5	59,6	06013019

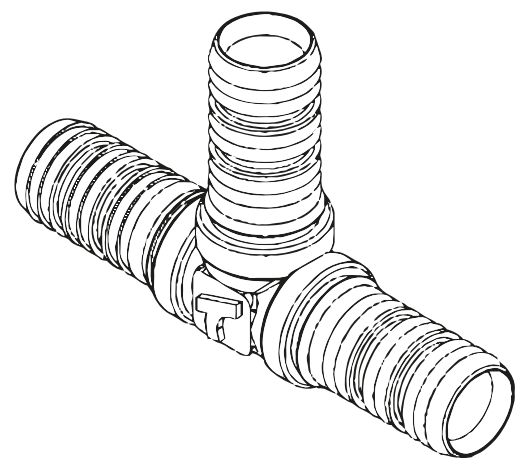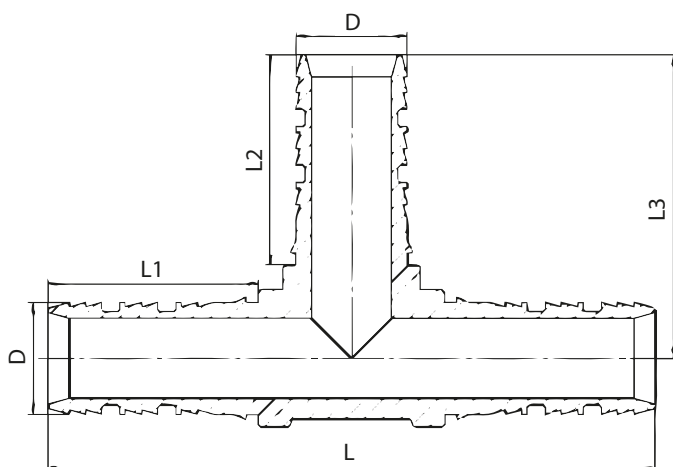

Overview

The connection between the pipe and the fitting is obtained by pressing the pipe into the fitting's profile. The pressing should be made in the connection area, with a pressing tool equipped with U-type inserts, matched to the type of fitting used. The tightness of the connection chamber is guaranteed by two O-rings, perfectly integrated into the joint area. Pressed connections can be used in the floor groove or a wall furrow.



Tweetop sp. z o.o.
Ludowa 24c | 71-700 Szczecin

Scope of delivery

Main body with sealing and clamping rings