

Material

- Main body: pressed brass type CW617, nickel-plated from the outside, on surfaces, which do not have contact with water – full anti-diffusion barrier
- Clamping ring: stainless steel
- O-ring gasket: EPDM

Area of application



- Installations of hot & cold tap water
- Central heating (radiator connections)
- Surface heating (underfloor and wall heating installations)
- Ice water

Overview

The connection between the pipe and the fitting is obtained by pressing the pipe into the fitting's profile. The pressing should be made in the connection area, with a pressing tool equipped with U-type inserts, matched to the type of fitting used. The tightness of the connection chamber is guaranteed by two O-rings, perfectly integrated into the joint area. Pressed connections can be used in the floor groove or a wall furrow.

Dimensions

Size	L1	L2	Rp	D	Code
16x1/2"	19	26	26	13,8	06011205
16x3/4"	20	26	26	15,8	06011207
16x1"	22	26	32,6	19,8	06011209
18x1/2"	19	26	32,6	25,8	06011211
18x3/4"	20	26	26	13,8	06011213
20x1/2"	19	26	32,6	19,8	06011215
20x3/4"	20	26	32,6	25,8	06011217
20x1"	22	26	32,6	19,8	06011219
25x1/2"	20,4	26	32,6	25,8	06011221
25x3/4"	19,4	32,6	32,6	25,8	06011223
25x1"	22,4	26	45	31,8	06011225
32x3/4"	19,6	32,6	45	13,8	06011227
32x1"	21,9	32,6	45	31,8	06011229
32x1 1/2"	26,4	32,6	45	40,8	06011231
32x1 1/4"	25	32,6	45	40,8	06011233
40x1 1/4"	34	45	45	40,8	06011235
50x1 1/2"	34	32,6	68	50,7	06011237
50x2"	39	32,6	68	50,7	06011239
63x2"	39	45	68	50,7	06011241
75x2 1/2"	47	45	68	50,7	06011243

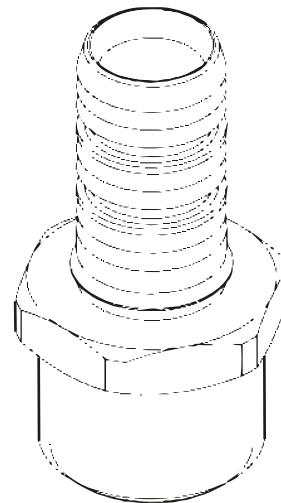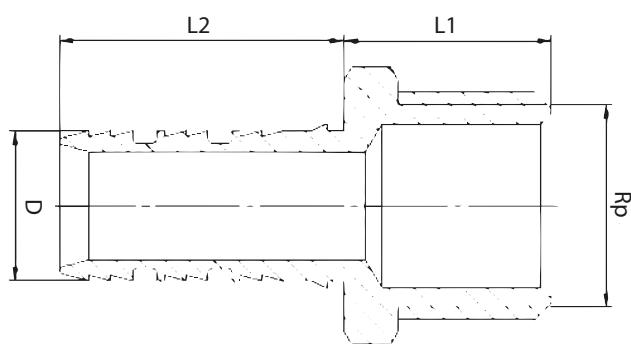

Scope of delivery

Main body with sealing and clamping rings